


LED Acrylic Light Panel

- CSA/UL Listed
- Available in Custom Sizes, 48" X 96"
- Slim and Super Bright
- Frameless, easy to install in different applications
- Even and Consistent Illumination Achieved by CNC Engraving Techniques
- Energy Saving and Maintenance Free
- Short Lead Time, Shipped Everywhere in Canada and the U.S.
- UL Approved, Class 2 Power Supply
- Advanced 3-year Warranty
- 2800 Average Lux

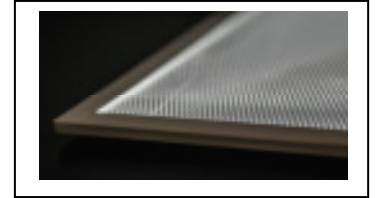

Specifications

Input Voltage	24 Volt DC or 12 Volt DC
Power Consumption	16 Watts/ft of the Longer Side
Wire Length	36", with a Female Connector
Light Source	SMD3014 LED on the Two Long Sides, 2000-3000 Lumen
Connector	Standard Male-Female DC Connection
Certification	CSA/UL (258420)
Color Temperature	4100K / 6500K
Mounting	Wall Mount / "Z" Channel / "J" Channel / Stand Offs
Operating Temperature	-30 °C (-22 °F) ~ +40 °C (+104 °F)
Environment	Dry location only
Face Material (Optional)	Clear Petg / White Diffuser
Options	Single Sided / Double Sided
Panel Thickness	3/8 " (Depth) X 1/2" (Width of the Border Around)

Accessories (Power Adaptors)

Plug-In Power Accessories	24V DC, 5A, 60W, UL class 2 listed
----------------------------------	------------------------------------



258420